



Type	WDHS-200Z
Part No.	99 10 05
Electrical	
Power supply	AC220V
Terminal number	1~200
Self lightning protection ability	Imax(8/20us)100KA
Indication	Run indication,Power indication,Alarm indication
Networking mode	Flexible networking
Communication mode	RS 485 (upstream)、ZigBee(downstream)
Transmission rate	4800bps
Wireless transmission distance (visual)	2500M
Mechanical	
Method of mounting	35 mm DIN rail
Enclosure dimensions (HxWxD)	90 mm × 54 mm × 66 mm
Cross-sectional area (max.)	2.5 mm ² stranded / flexible
Cross-sectional area (min.)	1 mm ² stranded / flexible
Stripping length terminals	7 mm
Torque contacts	0.2 N*m
Environmental	
Location category	Indoor only
Operation temperature range (T _U)	-40°C ... +70°C
Relative humidity	≤ 95%
Operation altitude	≤ 4 km
Degree of protection	IP 20
Enclosure material	Thermoplastic, UL 94V-0

wiring diagram

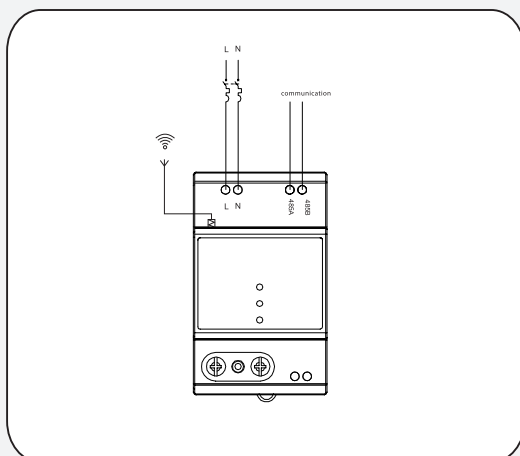

Dimension drawing

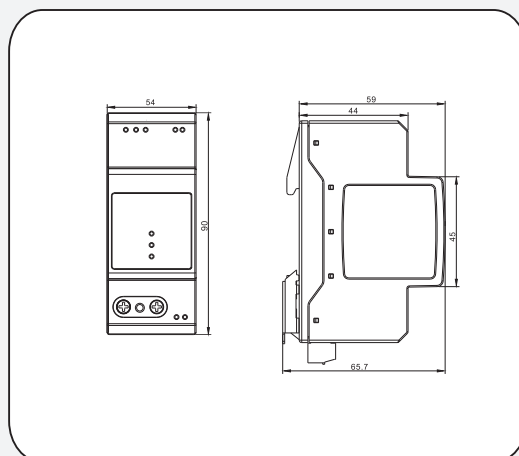

Function: System communications, Receive data from wireless SPD monitoring module ,
And transfer to the system background